

MOTOTRBO™ DEP 250 PORTABLE RADIO

EASY TO USE, EASY TO MIGRATE

Simple and effective for the light user who values ease and efficiency



When you are choosing cost-effective two-way portable radios, you do not have to compromise features. The MOTOTRBO DEP 250 is a new range of practical, entry-level digital radios for professionals wanting to communicate with greater ease and efficiency.

The affordable DEP 250 radio offer all the benefits of digital technology – up to 40% longer talk-time, twice the voice capacity in a 12.5 kHz licensed channel, wider radio coverage and superior audio. In digital mode, your MOTOTRBO radio provides clearer voice communications throughout the coverage area, as compared to analog radios, rejecting static and noise in the background.

The digital radios outperform analog radios for demanding or extended work shifts, and ensure voice communications are easily and clearly understood. You get pre-programmed text messages for instant update at the push of a button. You receive voice announcement as an audio confirmation of channel changes. A versatile alternative for those who require additional radio features to meet increasing communication needs, while lowering operating costs.

The DEP 250 is easy to use and migrate from analog. Your radio users can operate and communicate on their new digital radios while on the job, as your business transitions to digital technology. Accessory compatibility ensures you can reuse your inventory of battery, antenna and charger, further protecting your investments. You can also choose the analog-only version of the DEP250 radio and unlock the capabilities of digital when the time is right with a simple software upgrade.

Experience MOTOTRBO digital voice communications trusted by millions of users for exceptional voice quality and exceptional performance. This means more productive workforce and lower operating costs for your business.

FEATURES


- Analog / Digital Voice Communications
- Voice Announcement
- Dual Capacity Direct Mode
- Pre-programmed Text Messaging
- Transmit Interrupt (Decode only)
- Digital Mobile Radio (DMR) Standards Compliant¹
- IP54 Rated
- Receive Audio Leveling

¹ Features only available in Digital mode

PRACTICAL AND EASY USE

An entry-level digital radio solution for users in hospitality, light manufacturing and event management.



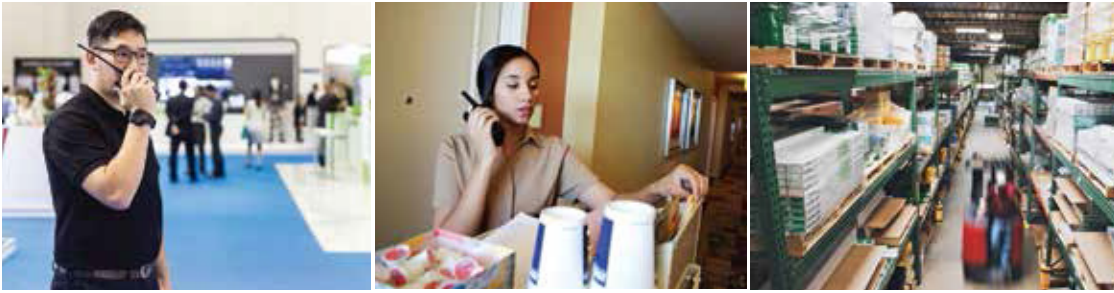

VERSATILE SOLUTION TO START AND GROW

The DEP 250 Series includes a non display version with no keypad (NKP) and 16 channels, and monochrome display version with limited keypad (LKP) and 160 channels.

The ability to operate in both analog and digital modes also makes it easy and affordable to adapt your new digital radios to work along with your existing analog radios. You can migrate to a digital two-way radio platform at your own pace.

INCREASED EFFICIENCY WITHOUT INCREASED COSTS

Powered by the Time Division Multiple Access (TDMA) digital technology, your DEP 250 provide twice the calling capacity (as compared to analog radio) for the price of one frequency license.

The radio features the Dual Capacity Direct Mode that unlocks the full capacity of your digital radio system to double your channels without the cost of a repeater and its associated infrastructure. This is how it works: in order for both time slots of a 12.5kHz DMR channel to carry simultaneous and independent traffic, you usually need a repeater to provide the timing reference. Your radios, with Dual Capacity Direct Mode, are able to synchronize automatically and collaboratively, eliminating the requirement for a timing reference. Now you can use both time slots, thereby doubling capacity and increasing spectrum efficiency without the cost of a repeater and its associated infrastructure.

Your investment in radio accessories does not go to waste. The DEP 250 incorporate the 2-pin accessory connector so you can reuse your existing audio earpieces. The advantage of accessory compatibility also extends to battery, antenna and charger.

CLEARER AUDIO, BETTER PERFORMANCE

When it comes to exceptional audio clarity, the quality of digital cannot be denied. The DEP 250 give you digital audio performance throughout your coverage area. The digital voice processing with enhanced call signalling ensures faster and more reliable calls.

The pre-programmed text messages permits fast and flexible communication, reaching out to your radio users in a high noise environment where voice is difficult to hear or when sensitive information is being communicated.

When your workers cannot be distracted, voice announcement provides audible confirmation of channel changes, as well as programmable buttons that eliminate the need to view the radio display. This customizable feature uses default audio files for easy operation.

VERSATILE FOR MANY ENVIRONMENTS

From the guest rooms to light manufacturing premises and moving across event locations, you can connect more people effortlessly wherever they work.

Easy to carry and operate, your housekeepers can quickly update the supervisors from inside the guest rooms or on the hotel floors. Their DEP 250 deliver both voice and data throughout the entire coverage area of your sprawling resort or high-rise hotel buildings.

With DEP 250, your on-site crew runs on double call capacity on the same radio spectrum. Giving them more open lines for instant updates, as they run more events with greater efficiency. When there is an emergency, you can send the closest security employee to any part of the venue and speed up response time.

Your assembly line workers can rely on the clear digital audio of their DEP 250 to filter out background noise. They can hear clearly anywhere in the busy factory or use one of the programmable buttons to send pre-programmed text messages.

MADE FOR LIFE, MADE TO LAST

The DEP 250 meet demanding specifications, including IP54 for dust and water and U.S Military Standard 810C, D, E, F, G and H for exceptional durability. They also surpassed the Accelerated Life Testing (ALT) where they were subjected to simulation of 5 years of hard use in real life. These tests included drop, temperature shock, vibration, dust, ESD and humidity.

PRODUCT SPEC SHEET

MOTOTRBO™ DEP250 PORTABLE RADIO

GENERAL SPECIFICATIONS

	DEP250 NKP ANALOGUE		DEP250 LKP ANALOGUE		DEP250 NKP ANALOGUE / DIGITAL		
	VHF	UHF BAND 1	VHF	UHF BAND 1	VHF	UHF BAND 1	350MHz
Channel Capacity	16		160		16		
Typical RF Output							
Low Power	1 W	1 W	1 W	1 W	1 W	1 W	1 W
High Power	5 W	4 W	5 W	4 W	5 W	4 W	4 W
Frequency	136-174 MHz	403-480 MHz	136-174 MHz	403-480 MHz	136-174 MHz	403-480 MHz	350-400 MHz
Dimensions (H x W x L)	120.0 x 55.0 x 34.7 mm		120.0 x 55.0 x 36.5 mm		120.0 x 55.0 x 34.7 mm		
Li-Ion 1700mAh	120.0 x 55.0 x 39.9 mm		120.0 x 55.0 x 41.7 mm		120.0 x 55.0 x 39.9 mm		
High Cap Li-Ion 2250mAh							
Weight with battery:							
Li-Ion 1700mAh	276 g		295 g		276 g		
High Cap Li-Ion 2250mAh	281 g		300 g		281 g		
Power Supply	7.5V (Nominal)						

BATTERY

Average battery life at 5/5/90 duty cycle with carrier squelch and transmitter in high power.*

Li-Ion 1750mAh	Analogue: 10.7 hrs / Digital: 14.4 hrs
High Cap Li-Ion 2250mAh	Analogue: 15.0 hrs / Digital: 20.0 hrs

RECEIVER

Frequency	136-174 MHz	403-480 MHz	136-174 MHz	403-480 MHz	136-174 MHz	403-480 MHz	350-400 MHz
Channel Spacing	12.5 kHz / 25 kHz						
Frequency Stability (-30°C, +60°C, +25°C Ref)	± 0.5 ppm						
Analog Sensitivity (12 dB SINAD)	0.3 uV / 0.22 uV (typical)						
Digital Sensitivity (5% BER)	N/A				0.25 uV / 0.19 uV (typical)		
Intermodulation (TIA603D)	70dB						
Adjacent Channel Selectivity (TIA603D)	45 dB @ 12.5 kHz / 70 dB @ 25 kHz						
Spurious Rejection (TIA603D)	70dB						
Rated Audio	0.5 W (Internal)						
Audio Distortion @ Rated Audio	5% (3% typical)						
Hum and Noise	-40 dB @ 12.5 kHz / -45 dB @ 25 kHz						
Audio Response	TIA603D						
Conducted Spurious Emissions (TIA603D)	-57 dBm						

TRANSMITTER

Frequency	136-174 MHz	403-480 MHz	136-174 MHz	403-480 MHz	136-174 MHz	403-480 MHz	350-400 MHz
Channel Spacing	12.5 kHz / 25 kHz						
Frequency Stability (-30°C, +60°C, +25°C Ref)	± 1.5 ppm						
Low Power Output	1W	1W	1W	1W	1W	1W	1W
High Power Output	5 W	4 W	5 W	4 W	5 W	4 W	4 W
Modulation Limiting	± 2.5 kHz @ 12.5 kHz / ± 5.0 kHz @ 25 kHz						
FM Hum and Noise	-40 dB @ 12.5 kHz / -45 dB @ 25 kHz						
Conducted / Radiated Emission	-36 dBm < 1 GHz / -30 dBm > 1 GHz						
Adjacent Channel Power	60 dB @ 12.5 kHz / 70 dB @ 25 kHz						
Audio Response	TIA603D						
Audio Distortion	3% (typical)						
4FSK Digital Modulation	N/A				12.5 kHz Data: 7K60F1D and 7K60FXD 12.5 kHz Voice: 7K60F1E and 7K60FXE Combination of 12.5 kHz Voice and Data: 7K60F1W		
Digital Vocoder Type	N/A				AMBE +2™		
Digital Protocol	N/A				ETSI TS 102 361-1, -2, -3		

*Actual battery runtime observed may vary.
Specifications subject to change without notice. All specifications shown are typical

MILITARY STANDARDS

Applicable MIL-STD	810C		810D		810E		810F		810G		810H	
	Method	Procedures	Method	Procedures	Method	Procedures	Method	Procedures	Method	Procedures	Method	Procedures
Low Pressure	500.1	I	500.2	II	500.3	II	500.4	I/II	500.5	I/II	500.6	II
High Temperature	501.1	I, II	501.2	I/A1, II/A1	501.3	I/A1, II/A1	501.4	I/Hot, II/Hot	501.5	I/A1, II/A2	501.7	I/A1, II/A1
Low Temperature	502.1	I	502.2	I/C3, II/C1	502.3	I/C3, II/C1	502.4	I/C3, II/C1	502.5	I/C3, II/C1	502.7	I/C3, II/C1
Temperature Shock	503.1	I	503.2	I/A1C3	503.3	I/A1C3	503.4	I	503.5	I/C	503.7	I-C
Solar Radiation	505.1	II	505.2	I	505.3	I	505.4	I	505.5	I/A1	505.7	I/A1
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III	506.5	I, III	506.6	I, III
Humidity	507.1	II	507.2	II	507.3	II	507.4	–	507.5	II - Aggravated	507.6	II - Aggravated
Salt fog	509.1	I	509.2	I	509.3	I	509.4	–	509.5	–	509.7	–
Blowing Dust	510.1	I	510.2	I	510.3	I	510.4	I	510.5	I	510.7	I
Blowing Sand	–	–	510.2	II	510.3	II	510.4	II	510.5	II	510.7	II
Vibration	514.2	VIII/F, W	514.3	I/10, II/3	514.4	I/10, II/3	514.5	I/24	514.6	I/24	514.8	I/24, II/5
Shock	516.2	I, III, V	516.3	I, VI, VI	516.4	I, VI, VI	516.5	I, VI, VI	516.6	I, VI, VI	516.8	I, IV, VI
Shock (Drop)	516.2	II	516.3	IV	516.4	IV	516.5	IV	516.6	IV	516.8	IV

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-30°C ¹ / +60°C
Storage Temperature	-40°C / +85°C
Thermal Shock	Per MIL-STD
Humidity	Per MIL-STD
ESD	IEC 61000-4-2 Level 3
Dust and Water Intrusion	IP54. MIL-STD
Packaging Test	MIL-STD 810D and E

¹ Radio only - Li-Ion battery -10°C
 Specifications subject to change without notice.
 All specifications shown are typical.

For more information on the MOTOTRBO™ DEP 250, visit motorolasolutions.com/mototrbo.

To find your nearest Motorola Channel Partner, go to motorolasolutions.com/contactus.

1Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. motorolasolutions.com

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 03-2023 Motorola Solutions, Inc. All rights reserved.

MOTOTRBO™
 DIGITAL REMASTERED.